




SIM. DIN 11024

Single Ring Beta Split Pins/R-Clips

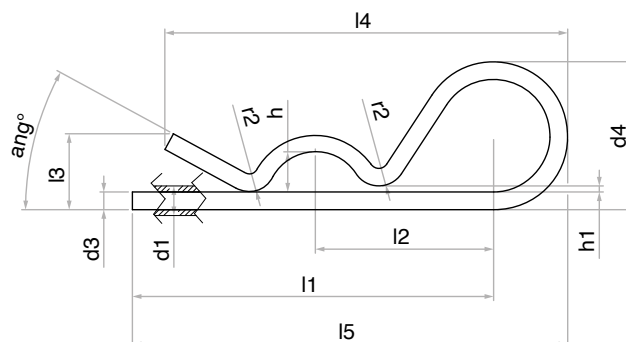

| Dimensions | Materials | Surface treatments | Packaging |
|------------------------------------|--|---|--------------|
| Dell'Era Drawing sim. DIN 11024 | Spring carbon steel <i>* low carbon steel diam. 7 only</i> | Zinc plating 3 to 12 MY (white, yellow, black, iridescent) | Carton boxes |
| Personalized drawing | Stainless steel A2 (AISI 304)  | Zinc flake coating | Bulk |
| | Stainless steel A4 (AISI 316)  | Zinc-Nickel plating | Sacks |

Dimensions in mm

| Real wire diameter d3 | Through hole diameter d1 | d4 | h | h1 | l1 | l2 | l3 | l4 | l5 | r2 | ang° | Standard packaging qty. |
|--------------------------|-----------------------------|--------|--------|------|--------|-------|--------|--------|--------|-------|-------|-------------------------|
| ± 0,02 | H13 | ± 1,00 | ± 1,00 | ~ | ~ | ~ | ± 1,50 | ± 1,50 | ± 1,50 | ~ | ± 10° | |
| 2 | 2,50 | 15,50 | 3,50 | 1,50 | 39,00 | 19,00 | 11,00 | 45,00 | 47,00 | 4,50 | 40° | 500 |
| 2,5 | 3,00 | 20,50 | 5,00 | 2,00 | 53,00 | 24,00 | 14,00 | 63,00 | 65,00 | 5,00 | 40° | 200 |
| 3 | 3,50 | 27,50 | 6,00 | 2,00 | 55,00 | 30,00 | 14,00 | 68,00 | 70,00 | 5,50 | 40° | 200 |
| ± 0,02 | H13 | ± 1,50 | ± 1,50 | ~ | ~ | ~ | ± 1,50 | ± 1,50 | ± 1,50 | ~ | ± 10° | |
| 3,5 | 4,00 | 29,00 | 6,00 | 2,50 | 60,00 | 33,00 | 15,00 | 73,00 | 75,00 | 6,00 | 40° | 100 |
| 4 | 4,50 | 30,00 | 6,00 | 2,50 | 70,00 | 36,00 | 20,00 | 84,00 | 86,00 | 7,00 | 40° | 100 |
| 4,5 | 5,00 | 32,00 | 6,00 | 2,50 | 75,00 | 38,00 | 20,00 | 87,00 | 90,00 | 7,50 | 40° | 100 |
| 5 | 6,00 | 34,00 | 6,00 | 2,50 | 77,00 | 38,00 | 20,00 | 94,00 | 97,00 | 9,00 | 40° | 50 |
| 6 | 7,00 | 38,00 | 7,50 | 2,50 | 90,00 | 45,00 | 24,00 | 105,00 | 108,00 | 10,00 | 40° | 50 |
| 7* | 8,00 | 40,00 | 9,00 | 2,50 | 105,00 | 50,00 | 26,00 | 116,00 | 124,00 | 10,00 | 40° | 25 |

Out of standard diameters available upon request: mm. 1,2 – 1,3 – 1,5 – 1,8 – 8,0